


BROCHURE RS RANGE



The RS range of polyp grabs are desinged to work in truck cranes.

They are characterized by their robustness, versatility for any type of work and speed of opening and closing.

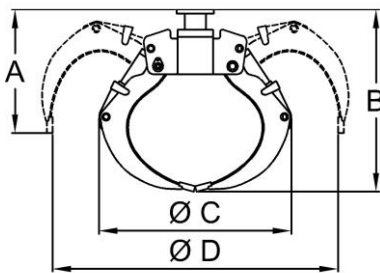

| MODEL | CAPACITY (LT) | MAX. BAR | Nº TINES | WEIGHT KG. | A mm. | Ø B mm. | Ø C mm. | D mm. |
|--------|---------------|----------|----------|------------|-------|---------|---------|-------|
| RS-150 | 150 | 200 | 4 | 220 | 620 | 800 | 900 | 1200 |
| RS-200 | 200 | 200 | 4 | 240 | 650 | 910 | 930 | 1400 |
| RS-250 | 250 | 250 | 4 | 340 | 650 | 950 | 1080 | 1550 |
| RS-270 | 270 | 250 | 4 | 360 | 650 | 980 | 1120 | 1600 |
| RS-320 | 320 | 250 | 4/5 | 380 (4) | 670 | 1020 | 1200 | 1700 |

TECHNICAL DATA CAN BE REVISED WITHOUT PRIOR NOTICE.